

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 April 2004 (15.04.2004)


PCT

(10) International Publication Number  
**WO 2004/030888 A1**

- (51) International Patent Classification<sup>7</sup>: **B29C 33/02**, 33/34, 39/02
- (21) International Application Number: **PCT/US2003/030843**
- (22) International Filing Date: 30 September 2003 (30.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/414,969 30 September 2002 (30.09.2002) US
- (71) Applicant (for all designated States except US): **3DM TECHNOLOGIES, INC.** [US/US]; 56 Macomb Place, Mt. Clemens, MI 48043-5636 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LINARES, Miguel**, A. [US/US]; 2769 Mackintosh Lane, Bloomfield Hills, MI 48302 (US). **DINELLO, Panfilo, M.** [US/US]; 38623 Wingate, Clinton Township, MI 48038 (US).
- (74) Agents: **CARGILL, Lynn, E.** et al.; Cargill & Associates, P.L.L.C., 56 Macomb Place, Mount Clemens, MI 48043-5636 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declarations under Rule 4.17:  
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

[Continued on next page]

(54) Title: PRODUCTION APPARATUS FOR FORMING PLASTIC MOLDED ARTICLES

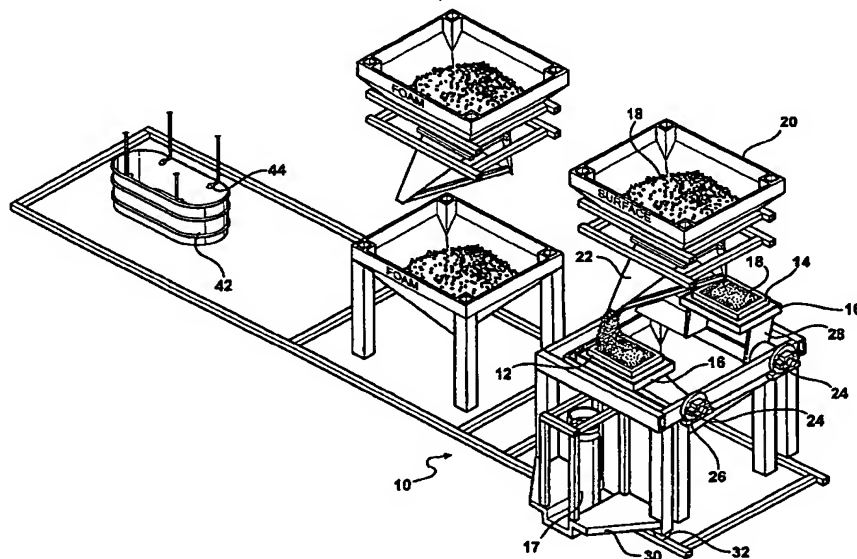

(57) Abstract: An apparatus (10) for making plastic molded articles generally having a double-skinned configuration with a foamed interior extending between the two skins. Such an article can be produced with a double beauty finish, and various inserts can be placed within the foamed interior between the two skins. The apparatus (10) includes the machinery used in order to make such a plastic article. The heated mold configurations can be made of inexpensive aluminum, compared to the traditional stainless steel production mold, and therefore will help the manufacture of large molded plastic articles.

## PRODUCTION APPARATUS FOR FORMING PLASTIC MOLDED ARTICLES

5

**CROSS REFERENCES TO RELATED APPLICATIONS**

10           This application claims the benefit of U.S. Provisional Application No. 60/414,969 filed on September 30, 2002.

**TECHNICAL FIELD**

15

          This invention relates to methods and apparatus for molding plastic articles, and more particularly relates to a method and apparatus for molding plastic into articles from particulate plastic material.

20

**BACKGROUND OF THE INVENTION**

          Since the introduction of plastics in the 1940's after World War II, engineers have been utilizing plastic to make any number of different articles. The plastic industry  
25   started with an injection molding machine and method, and has since been advanced into blow-molding, roto-molding, compression-molding, and other means of making plastic articles. Making a mold for an injection molding machine, which is the most common form of forming plastic, is basically a series of steps which include the manufacture of an aluminum or Kirksite mold in order to produce proto-type plastic parts. These molds  
30   generally can produce a number of plastic articles on the order of from approximately 100 parts to about 2 to 3 thousands parts, depending on what the tolerances are for the molded articles themselves. If the molded articles have a lot of sharp corners and high tolerance components, the aluminum or Kirksite mold will quickly degrade in quality and maintain its tolerances due to the fact that high pressure is utilized to force melted plastic particles into the

mold with such pressure that it will force the plastic into all the nooks and crannies of the mold, thereby forming a complex part. As injection molding is the most common of the plastic forming techniques, it is well known to be the least expensive means for forming large numbers of such plastic articles.

5

Although injection molding is the least expensive process, this is only the case if the plastic articles being formed are being made in large volumes. The cost of the injection mold must be amortized over the cost of all of the plastic parts. For instance, if a mold costs \$150,000 U.S. dollars, and it is planned to form 600,000 parts, then \$150,000 or one-quarter, of the costs of each of the 600,000 parts must be attributed to the cost of the mold. Therefore, it has always been an expensive proposition to run a small number of plastic parts with an expensive injection mold. The cost of the mold may raise the cost of the plastic parts to a point where it is not feasible.

15

Other methods of forming plastic have their advantages and disadvantages as well. Some of them do not produce parts that have smooth surfaces on both sides, some of them produce articles utilizing even more expensive materials and producing parts that will not crack and stress, while other methods may produce one-sided articles, which may or may not be suitable for certain production items.

20

Previous methods have formed plastic articles that have modulus strengths which are limited by the modulus strengths of the plastic itself. A steel article has a modulus strength on the order of a 30 modulus. Other materials have modulus strengths generally therebetween. Prior art methods have not been known to strengthen the modulus strength of certain plastic articles, with the exception of the inclusion of various chopped fibers and the like. In addition, load bearing structural elements have been produced for large, self-supporting panels having a high weight to strength ratio for bridge components, airplane decks, and the like. These components have formed roof panels and the like although there are certain drawbacks which prevent it from being used in the automotive or aircraft industries. These components, however, generally have been produced with a poor surface finish, and will not provide the type of detail which may be necessary for many applications.

25

In addition, prior art methods have been utilized to incorporate a "sandwiched" form, including a foamed polyurethane core, which may be in the form of a foam sponge, or it may be a foamed core which produces gaseous substances during the

35

curing, in order to increase the volume of the foamed core. Certain reinforcing fibers may also be incorporated in an attempt to increase the strength of the plastic.

By way of explanation of various other methods and embodiments of the method and resulting articles, we are hereby also incorporating by reference the United States Provisional Patent Applications No. 60/270,321 filed on February 5, 2001; No. 60/300,874 filed on June 25, 2001; No. 60/346,336 filed on January 7, 2002; and International Application No. PCT/US02/03298 filed on February 5, 2002.

Therefore, it would be a great advantage to the industry if a new method and apparatus could be promoted for inexpensively manufacturing large, strong plastic articles. It would be an even greater advantage if the molds were so inexpensive that small production numbers could become economically feasible.

### SUMMARY OF THE INVENTION

In accordance with the above noted advantages and desires of the industry, the present invention provides a production line method and apparatus for forming plastic molded articles utilizing heated molds and particulate thermal plastic materials having a melting point which allows the particulate materials to melt and form skins on the heated molds. Further disclosed is a method of making articles with the production method utilizing the production line apparatus, in order to make plastic articles with a double-skinned and generally including a foamed center in certain embodiments.

One specific preferred embodiment includes the use of complementary heated molds which are first filled with a first powdered plastic material in order to form a melted skin thereon, followed by inserting a foamable plastic between the complementary molds, and the heat from the heated molds being utilized to kick off the foam and allow it to expand into the cavity between the two skins. Thereafter, the molds are cooled, and the part is released. In this one specific embodiment, the initial skinned molds are tipped upside down in order to release any unmelted plastic materials into a receptacle thereunder.

In another aspect of the specific embodiment, there is a rolling cart utilizing the molds in a tipping arrangement such that the rolling cart may be rolled from underneath a distribution system for the surface plastic powder materials, which can then be moved underneath a distribution system for the foam powder plastics.

5

Therefore, the invention is particularly useful for applications of making very large plastic articles, while maintaining an inexpensive mold for use in the process. The preferred embodiment of the mold includes the use of CNC routed aluminum molds, which can be used many times over in a production setting. Needless to say, the use of the aluminum mold is much less expensive for production than a stainless steel mold which is commonly used in the industry for injection molded processes. There has long been a need for an inexpensive mold which could be used for the production of very large plastic articles. By way of contrast, stainless steel molds suitable for production of injection molded parts are generally extremely expensive, on the order of millions of dollars for large articles such as pick-up truck boxes, boat hulls, sewer pipes and the like. On the other hand, in the instance of a pick-up truck box bed, the present invention includes the use of a mold which would cost on the order of several hundred thousand dollars, rather than several millions of dollars for a stainless steel injection molding production mold.

Although the invention will be described by way of examples hereinbelow for specific embodiments having certain features, it must also be realized that minor modifications that do not require undo experimentation on the part of the practitioner are covered within the scope and breadth of this invention. Additional advantages and other novel features of the present invention will be set forth in the description that follows and in particular will be apparent to those skilled in the art upon examination or may be learned within the practice of the invention. Therefore, the invention is capable of many other different embodiments and its details are capable of modifications of various aspects which will be obvious to those of ordinary skill in the art all without departing from the spirit of the present invention. Accordingly, the rest of the description will be regarded as illustrative rather than restrictive.

30

**BRIEF DESCRIPTION OF THE DRAWINGS**

For a further understanding of the nature and advantages of the expected scope and various embodiments of the present invention, reference shall be made to the following  
5 detailed description, and when taken in conjunction with the accompanying drawings, in which like parts are given the same reference numerals, and wherein:

FIG. 1 is a front perspective view of a powder mold plastic article making  
10 apparatus made in accordance with the present invention showing a rolling cart for holding mold sections in position under a plastic particulate distributor;

FIG. 2 shows the same apparatus of FIG. 1, but with the rolling cart in a secondary position under another particulate material distributor;

15 FIG. 3. is a perspective view of the mold removed from the cart and being lowered into the cooling mechanism in accordance with the present invention;

FIG. 4 is a side elevational view of a heating glove;

20 FIG. 5 is a side perspective view of the heating glove;

FIG. 6 is a bottom perspective view of the distributor arms and hopper of the surface powder station of the present invention;

25 FIG. 7 is a bottom perspective view of the distributor arms, hopper and shut-off valve of the foam powder station;

FIG. 8 is a perspective view of the mold/heater glove combination;

30 FIG 9 is a side elevational view of a clamping mechanism;

FIG. 10 is a perspective view of the tipping mechanism;

FIG. 11 is a detailed illustration of one embodiment of the cooling station;

FIG. 12 is a front elevational view of a resulting plastic article; and

FIG. 13 is a front elevational view of a resulting plastic article made with the use of the clamping mechanism.

5

## **DETAILED DESCRIPTION OF THE INVENTION**

In accordance with the objects and advantages being sought hereinabove, the present invention discloses a production line method and apparatus for forming plastic molded articles utilizing heated molds and particulate thermoplastic materials. The present method will yield a double-skinned, foamed center plastic article, which may or may not include various reinforcements within the foamed layer to add strength or other functionalities. In that regard, there is shown a schematic view of the apparatus for the production line as seen in FIG. 1. A plastic forming production line as shown in FIG. 1 is generally denoted by the numeral 10, and incorporates the use of a first female mold and a second male mold, 12 and 14, respectively. The female and male mold sections 12 and 14 are shown in contact with mold heaters 16 which utilize propane from propane tank 17 in order to heat the mold sections. After the molds 12 and 14 are heated, a particulate plastic material 18 is dropped from above and distributed from a hopper 20 via particulate distributor tubes 22 into the cavities of the molds 12 and 14. The plastic melts against the heated molds and forms a skin on the molds.

In the current embodiment, hopper 20 has a large supply of the particulate plastic material 18, which is preferably a powder, but may also be pellets, resin or any other type of dry particulate material. The powdered materials are distributed via distributor tubes 22 onto the top of the male and female molds 12 and 14. As the molds 12 and 14 have been preheated by heater 16 to a temperature above the melting temperature of the particulate material 18, once the powdered material is distributed through tubes 22 into the molds 12 and 14, the particulate material 18 is allowed to sit in the mold in order to melt against the heated mold to form the individual skins.

The preferred material for use in this application includes powdered polyurethane thermoplastic, available from Equistar Corporation in the United States, which

is readily available throughout the continental United States. Needless to say, any particulate material which is a thermoplastic material that can be melted, would be suitable for this application. Therefore, the list of appropriate materials would include polyethylene, polypropylene, nylons, and all the other thermoplastic materials known to one of ordinary skill in the art. Once powder 18 is sitting in the molds 12 and 14, a skin forms of the melted and fused plastic, while the uppermost portion of powder 18 (as it sits in the mold) will remain in its particulate form, and must be dumped after the appropriate thickness of the skin has been achieved. In our preferred embodiments, the skin shall be manufactured to a thickness of between about 0.5mm and about 5mm.

Various applications will require various thicknesses of the skin. It has been found that the particulate material, when it is in powdered form, having a mesh size of slightly larger than talc powder, has a preferred residence time of approximately one minute per millimeter of thickness of skin. In other words, a full load of powdered material 18 is dumped into molds 12 and 14, after the molds have been heated to approximately between about 180°F to 450°F, and for every minute that the powder remains in contact with the heated mold, the skin becomes one millimeter thicker. For instance, our preferred thickness for automotive applications is approximately 3mm thick. Therefore, the powdered material is allowed to stay in contact with the heated mold for about three minutes. Of course, the form of the powder affects the length of residency time, as a more coarse powder would require a longer residence time in order to melt it against the mold to form a skin. For example, pelletized plastic material may require a residence time in the mold of from about 0.5 minutes to about 20 minutes to achieve a desired thickness.

The heaters 16 will be more fully described hereinbelow, as they are referred to by the inventors as a "heater glove" and the molds 12 and 14 are placed in close proximity to the heater glove. The heater glove will heat the molds, which are preferably made of aluminum or any suitable efficient heat conductive material, to an even temperature of around 180°F to 450°F. In order to melt the polyurethane plastic which is purchased from Equistar Corporation, the molds are preferably heated to a temperature above the melting point of the plastic.

Therefore, the most preferred embodiment utilizes an all aluminum mold, which has been CNC ground into a appropriate configuration, and that mold is heated by flame to an optimum temperature of about 415°F, and is then contacted with a finely



powdered polyurethane thermoplastic material, such as that purchased from Equistar Corporation.

Once the desired skin thickness has been achieved, the molds 12 and 14 need  
5 to be emptied to prevent further skin formation. In order to prevent further skin formation,  
the molds may be tipped over so that the excess powder can be tipped out of the mold and  
collected in a lower hopper 26, which is called the particulate return hopper 26. The molds of  
the present invention are tipped inward to empty the excess particulate material into the  
return hopper via turning axis 24. The mold heater is attached to a pivoting, tipping support  
10 28, and rotates about turning axis 24 in order to dump the excess powder into the hopper 26.  
Once the tipping mechanism has been finished, the mold transfer rolling cart 30, to which all  
of the above equipment has been mounted, includes wheels 32 for transporting the transfer  
cart from station to station. Once the operation has been finished at the first station, the mold  
transfer cart is then rolled to a second position underneath a similar second station, wherein  
15 the second station is similar to the first, but having a new particulate material generally a  
particulate foaming material.

At this time, reinforcements may be added to the mold prior to the distribution  
of foam through its distributor tubes into the molds. The foam powder distributor mechanism  
20 is preferably of a similar configuration to the surface powder distribution mechanism  
described hereinabove with reference to FIG. 1. Reinforcements suitable to be put into the  
mold may include nearly anything, but are preferably pieces of fiberglass cloth, Kevlar cloth,  
steel mesh, steel perforated sheets, or any other thing which may be porous to allow the foam  
to foam up, in and around, and encapsulate the reinforcement within the mold.

25 Looking now to FIG. 2, there is shown the tipping occurring at the foam  
station to remove the excess foam powder. This foam powder operation is a similar operation  
to that which occurs (but is not shown) at the surface powder station. Once the excess foam  
powder has been dumped from the molds, the two molds are held together and clamped to  
30 form a cavity into which the foam can expand into. The foam is a polyurethane material  
available from Equistar Corporation, and is sold under their proprietary materials group.  
Again, the excess foam material powder is tipped out of the molds into the return hopper,  
similar to the particulate return hopper 26 with regards to the surface transfer station, and the  
excess is vacuumed back upwards to the distributor hopper 20. If the perfect amount of  
35 foaming plastic can be put into the mold, then tipping out excess would not be required.

The two molds are then held together to allow the heat from the molds to activate the foamable polyurethane particulate material such that it foams up into the cavity created by the first and second molds 12 and 14, respectively. Any foamable material may be suitable for this application, and it may also be applied as a liquid in addition to the powdered or particulate foam material which is used in the preferred embodiment of the present invention.

Preferably a light clamping pressure is all that is required to hold the two molds together to maintain a minimum amount of flashing and to evenly distribute gaseous bubbles generated in the foaming procedure throughout, without delaminating the two skins from the foamed material. In the event that a liquid foamable material is to be used, the molds may be held in a horizontal orientation, such that the foamable material may be spread into the bottom mold, while a top mold can be maneuvered into position on top of the bottom mold, and allow the foam to expand into position. Generally, the foaming operation takes anywhere from about one-half minute to about twenty minutes for full expansion of the foam, depending on the foaming product which is utilized. Generally, the same plastic powder is used as the surface plastic, only it has been pre-mixed with a foaming or blowing agent. Such blowing agent is well known in the art, and can be mixed into the plastic powder without any undue experimentation. Furthermore, the foaming action is also dependent on the reinforcements which are included within the mold prior to the mold being held together. The reinforcements become encapsulated by the foam, and become an integral part of the foamed article, once the plastic has cooled and set into a solid material.

Looking now to FIG. 3, the mold is shown as having been hoisted up by a chain 40, and has been transferred to a location above a water-fed mold cooling station 42, which includes the spraying of water through nozzles 44 from the city water supply onto the outsides of the mold in order to cool the mold and the contents. As can be seen in FIG. 3, the nozzles 44 in the oval-shaped tub 42 are spaced so as to more evenly distribute the water against the surface of the mold. The mold is lowered into the oval-shaped cooling station, and the water is pressurized out of the nozzles against the outside of the mold, and the mold is cooled for a period of anywhere from about 5 minutes to about 90 minutes. Thereafter, the mold halves are opened and the foamed article is released. It must be realized, though, that any method of cooling is acceptable, including cool air jetting, placement into a refrigerator or placement into a cooling medium.

Looking next to FIG. 4, there is shown a photograph of the heating glove generally denoted by the numeral 50, described hereinabove with reference to FIGS. 1-3 for heating the molds. The heater glove 50 of FIG. 4 illustrates the heating baffle 52 which is helpful in maintaining a flame when the heater glove is being tipped back and forth. In order to keep heat on the mold while the powder is being tipped out of it, a flame-out-proof design was needed. Baffle 52 keeps the flame lit even during the tipping procedure. Heater glove 50 is shown with a baffle 52 and a distribution means 54, along with exhaust tubes 56 in order to remove the excess heated air. Clamps 58 are shown, but will be described below.

Once the heater glove 50 is covered with mold 14, as shown in FIG. 5, clamps 58 are shown holding the side of the mold against the heater glove box 50. As can be seen, the heater glove box 50 is mounted on an angled piece of steel 28 attached to an axis below. As the axis turns, any excess powder will be tipped out of mold 14. In FIG. 5, the mold 14 is shown without the powder therein, in order to show details of the mold, the axis, and its position.

FIGS. 6 and 7 show the bottom side of the hopper 20 as shown in FIGS. 1-3, and hopper 20 is shown with its distribution arms 22 extending downwardly therefrom. Shutoff valve 60 is shown in the open position, whereas if the flat portion 62 of the shutoff valve is shoved over the distributor tubes 22, the flow is cut off. However, FIGS. 6 and 7 illustrate the shutoff valve in the open position, such that material 18 from in the hopper 20 held above mold 14 will flow downwardly by gravity into the mold. Pre-measured amounts of powder are put into the hopper so that when there is a sufficient amount of powder and the mold, the hopper will most generally be empty.

Looking next to FIGS. 8 and 9, there is shown the preferred clamping arms 58 which hold the mold 14 to the heater box 50 below. In the preferred embodiment, the clamping arms 58 are hydraulically operated, or may be operated pneumatically for rapid response. FIG. 9 is a close-up of clamping arm 58, while FIG. 8 shows the clamping arm 58 in its working environment.

FIG. 10 shows the tipping mechanism 24, or trunion, and shows the temperature dial on the side of the heater glove box 50. The trunion design will be used to rotate about the axis in order to flip so that mold 14 tips excess powder backward into the center of the transfer station and into the reservoir hopper which is located below. The

powdered material from the reservoir hopper may be vacuumed back up into the upper most hopper in order to recharge the surface and foam hoppers 20.

Looking now to FIG. 11 the water cooling station 42 of this production line includes a multitude of water nozzles 44 for even spraying of cool water onto the sides of the mold (not shown here) in order to cool it off. Once the mold has been lifted from the foam powder station, it is inserted between all of these nozzles from above and the nozzles are turned on for time periods from about 1 second to about 60 seconds, depending on how much steam is generated and the amount of steam which can be handled within the plant setting. After the water is sprayed from the nozzles, it is evacuated back into a reservoir system for further use. The water is recycled many times, and cools the mold prior to the end result coming out of the mold.

FIG. 12 illustrates a sample of a resulting plastic molded article known as a test plaque, with the paper-thin flashing extending around the perimeter of the mold where the seam has occurred, and it also shows the flat surface which can be achieved. The paper-thin flashing has been achieved due to the clamping arms which hold the mold together while the foaming is taking place. The clamping arms exert a very light pressure, on the order of from about 10mmHg to about 10,000mmHg, and this yields a superior product.

As shown in FIG. 13, the light clamping was not utilized during the process and consequently a heavier and larger flashing portion exuded from the mold seams when only gravity was used to hold the top mold against the bottom mold. Although this embodiment works equally as well, it is more economical to use less polyurethane foam powder if one clamps the molds together with a light pressure.

The resulting article may be any article including auto parts, boat parts, housing components or anything that may be made of plastic, all to be made by the preferred embodiment of the process described herein. Such articles include two skins, one on one side and one on the other of the article, each being any desired thickness although most articles preferably are approximately three millimeters in thickness. A one-inch thick foamed center is between the two skins, and the article may or may not be made with reinforcements therein. In the present example of a test plaque, a reinforcement of a fiberglass cloth was placed in the center of the plaque (the resulting plastic molded article) in order to impart strength. The previous patent applications which were filed for 3DM Technologies, Inc.,

have incorporated descriptions of the possible reinforcements which may be utilized, and those applications are incorporated herein by reference.

5 Therefore, the present invention has been described in enough detail to enable one of ordinary skill in the art to reproduce the method and apparatus for forming plastic molded articles in a production line setting without undue experimentation. All of the objects and advantages listed first in this patent application are met and/or exceeded.

10 The foregoing description of a preferred embodiment of the invention has been presented for purposes of illustration and description. It is not intended to be to be exhaustive or to limit the invention to the precise form disclosed. Obvious modifications or variations are possible in light of the above teachings with regards to the specific embodiments. The embodiment was chosen and described in order to best illustrate the principles of the invention and its practical applications to thereby enable one of ordinary skill in the art to best utilize the invention in various embodiments and with various  
15 modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the claims which are appended hereto.

20

### **INDUSTRIAL APPLICABILITY**

The present invention finds particular utility in the plastic molded article industry, and finds particular utility when making large plastic articles, such as automotive components, boat hauls and other marine applications, housing component manufacture, and for  
25 instance, sewer pipes and playground equipment.

CLAIMS

What is claimed is:

- 5                   1.     (canceled)
  
2.     A plastic forming apparatus for making plastics from at least two  
different particulate plastic materials, comprising:  
  - 10                   at least two complementary open bare surface molds, each mold being  
mounted on a rolling cart, where said molds are capable being moved along a trunion track and  
capable of being heated;  
    - said molds having at least one open bare surface with a sealing edge for  
ultimately mating with the other open mold, said open bare surface being disposed for receiving  
the particulate plastic materials;
    - 15                   at least one hopper for dumping a first particulate plastic into each of the  
open molds individually, said hopper having at least one distributor arm with a downwardly  
facing distributor tube including louvers for opening and closing the louvers to distribute the  
particulate material into each of the individual open molds, said hopper being capable of being  
recharged with surplus particulate plastic material after the molds are used;
    - 20                   a supply of heat for separately heating the complementary molds;
    - a second hopper for dumping a second particulate plastic into at least one  
of the molds, said second hopper also having a distributor arm with a downwardly facing  
distributor tube including louvers for selectively opening and closing the louvers to distribute the  
particulate material into the at least one mold, said hopper being capable of being recharged with  
25                   surplus particulate plastic material after the molds are used;
    - a cooling station for cooling the heated molds; and
    - a track for rolling the two carts from under the first hopper to a position  
under the second hopper and then into the cooling station.
  
- 30                   3.     The apparatus of claim 2, wherein the open molds are made of aluminum  
and further comprise heating plenums attached to the back of the molds to heat the molds.

07/21/2004 11:44 FAX 5864655566

008

4. The apparatus of claim 3, wherein the heating plenums include a propane fired heating unit capable of being tipped over after the particulate material has melted onto the mold, in order to discharge any remaining unmelted particulate plastic.

5. The apparatus of claim 2, wherein the molds are designed to be held apart at a predetermined distance to allow for a resulting article having a sandwich configuration with a foamed center.

6. The apparatus of claim 2, wherein the molds rotate on a horizontal axis on the rolling cart, such that after the desired melted skin has been formed on the mold, the mold can be tipped over to discharge excess plastic before the next step.

7. The apparatus of claim 2, further comprising dump trays under each of the hoppers for receiving the discharge excess plastic.

8. The apparatus of claim 2, further comprising a vacuum mechanism for transferring the excess particulate plastic contained in the dump trays back up into the hopper for further distribution into subsequent molds.

9. The apparatus of claim 2, further comprising water spraying nozzles in the cooling station for cooling the molds after the desired article has been formed.

10. A method of forming plastic articles from a particulate plastic material, comprising:

heating at least two complementary open bare surface molds mounted on a rolling cart, where said molds are capable being moved along a trunion track and capable of being heated;

dumping a first particulate plastic into at least one of the individual open bare surface molds from a first hopper, said hopper distributing the plastic into the at least one mold through at least one distributor arm with a downwardly facing distributor tube including louvers for opening and closing the louvers to distribute the particulate material into the individual open molds;

forming skins on each of the individual open molds by contacting the heated molds with the particulate plastic and melting the plastic against the mold;

AMENDED SHEET

07/21/2004 11:44 FAX 5864655566

00

tipping the molds to discharge any excess particulate plastic material from the open molds after a skin of melted plastic has been formed on the molds;

moving the rolling cart along the trunion track from underneath the first hopper to a second position under a second hopper;

5 dumping a second particulate plastic into at least one of the molds from a second hopper also having at least one distributor arm with a downwardly facing distributor tube including louvers for selectively opening and closing the louvers to distribute the particulate material into at least one of the molds, said hopper being capable of being recharged with surplus particulate plastic material after the molds are used;

10 moving the rolling cart along the trunion track from underneath the second hopper to a final position in a cooling station for cooling the heated molds; and

spraying the heated mold with cool water to cool the molds and removing the resulting article.


15 11. The method of claim 10, wherein the step of heating the molds is accomplished by heating to a temperature of from about 190 degrees F. to about 500 degrees F.

12. The method of claim 10, wherein the step of spraying the heated mold with cool water is accomplished by cooling to room temperature with a tap water supply.

20 13. The method of claim 10, further comprising a step of pre-heating the plastic particulate before introduction into a mold.

25 14. The method of claim 10, further comprising a step of exposing the plastic particulate to a gaseous fluid selected from the group consisting of nitrogen, helium, sulfur-containing gas, argon, neon, halogen-containing gas, hydrogen, acidic or basic gas, or combinations thereof in order to achieve individual material properties in the resulting article.



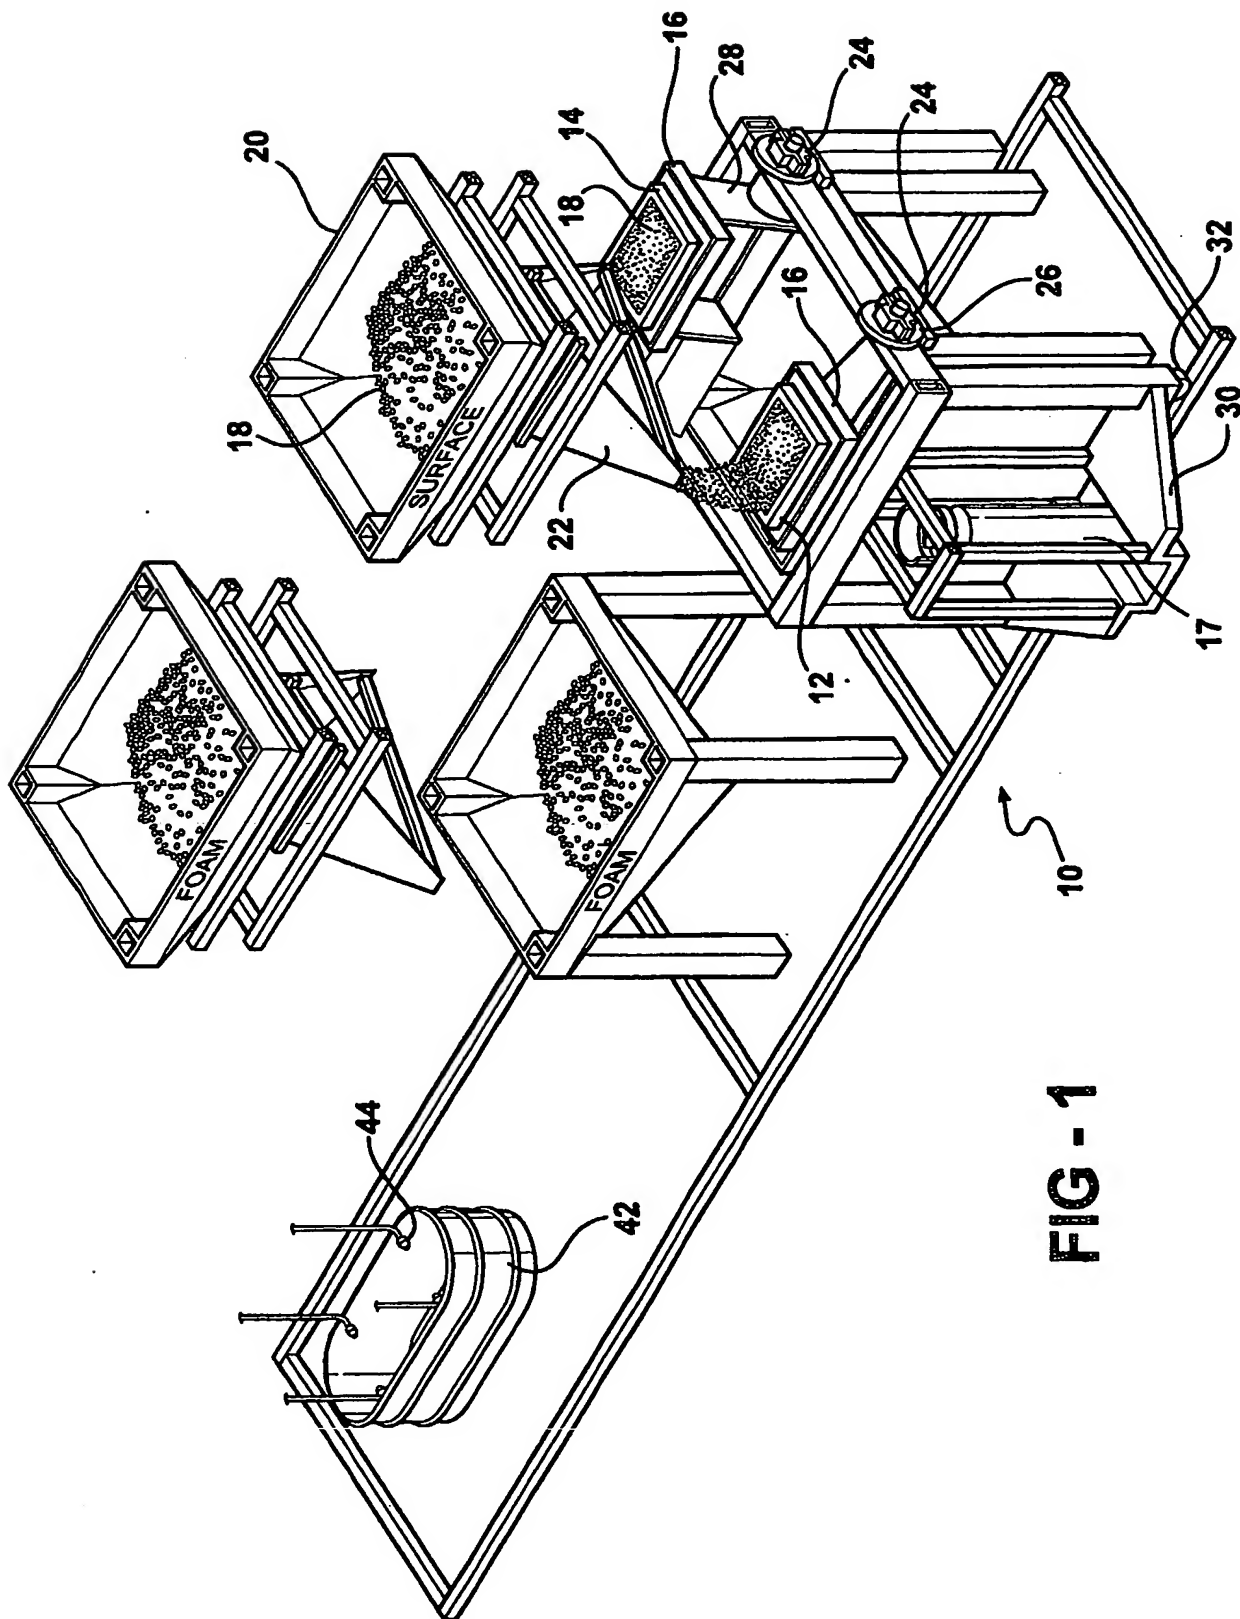

# 1-800-4-A-FILE

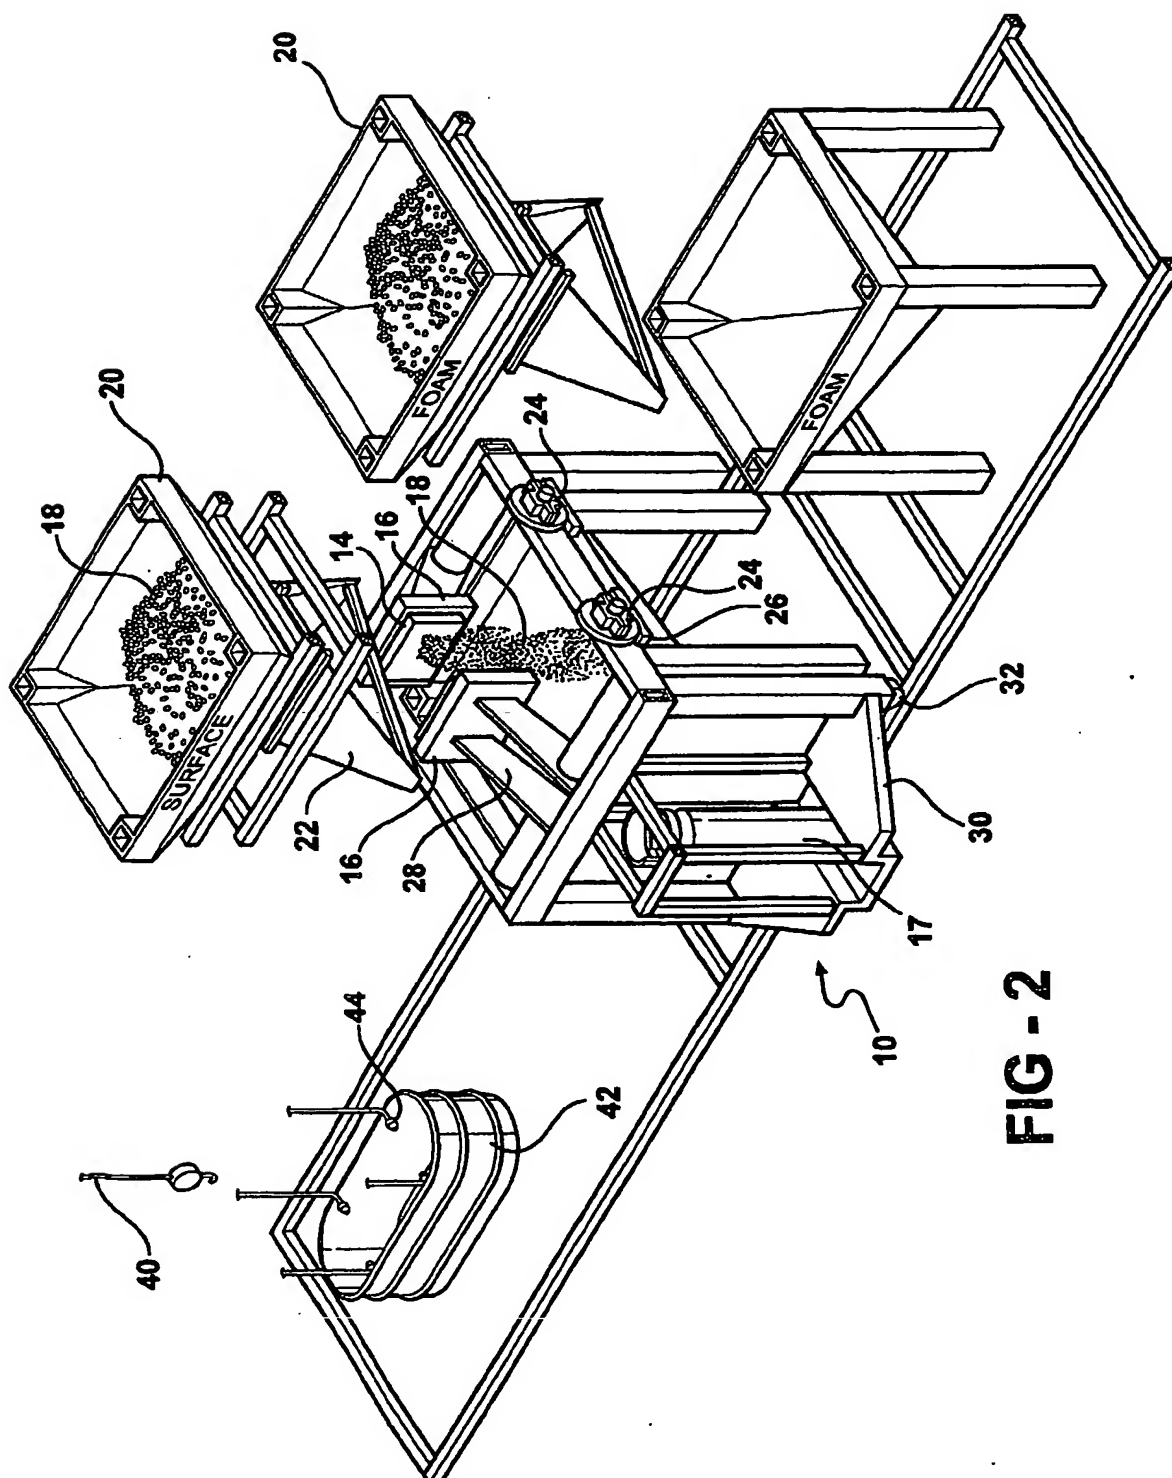


FIG - 2

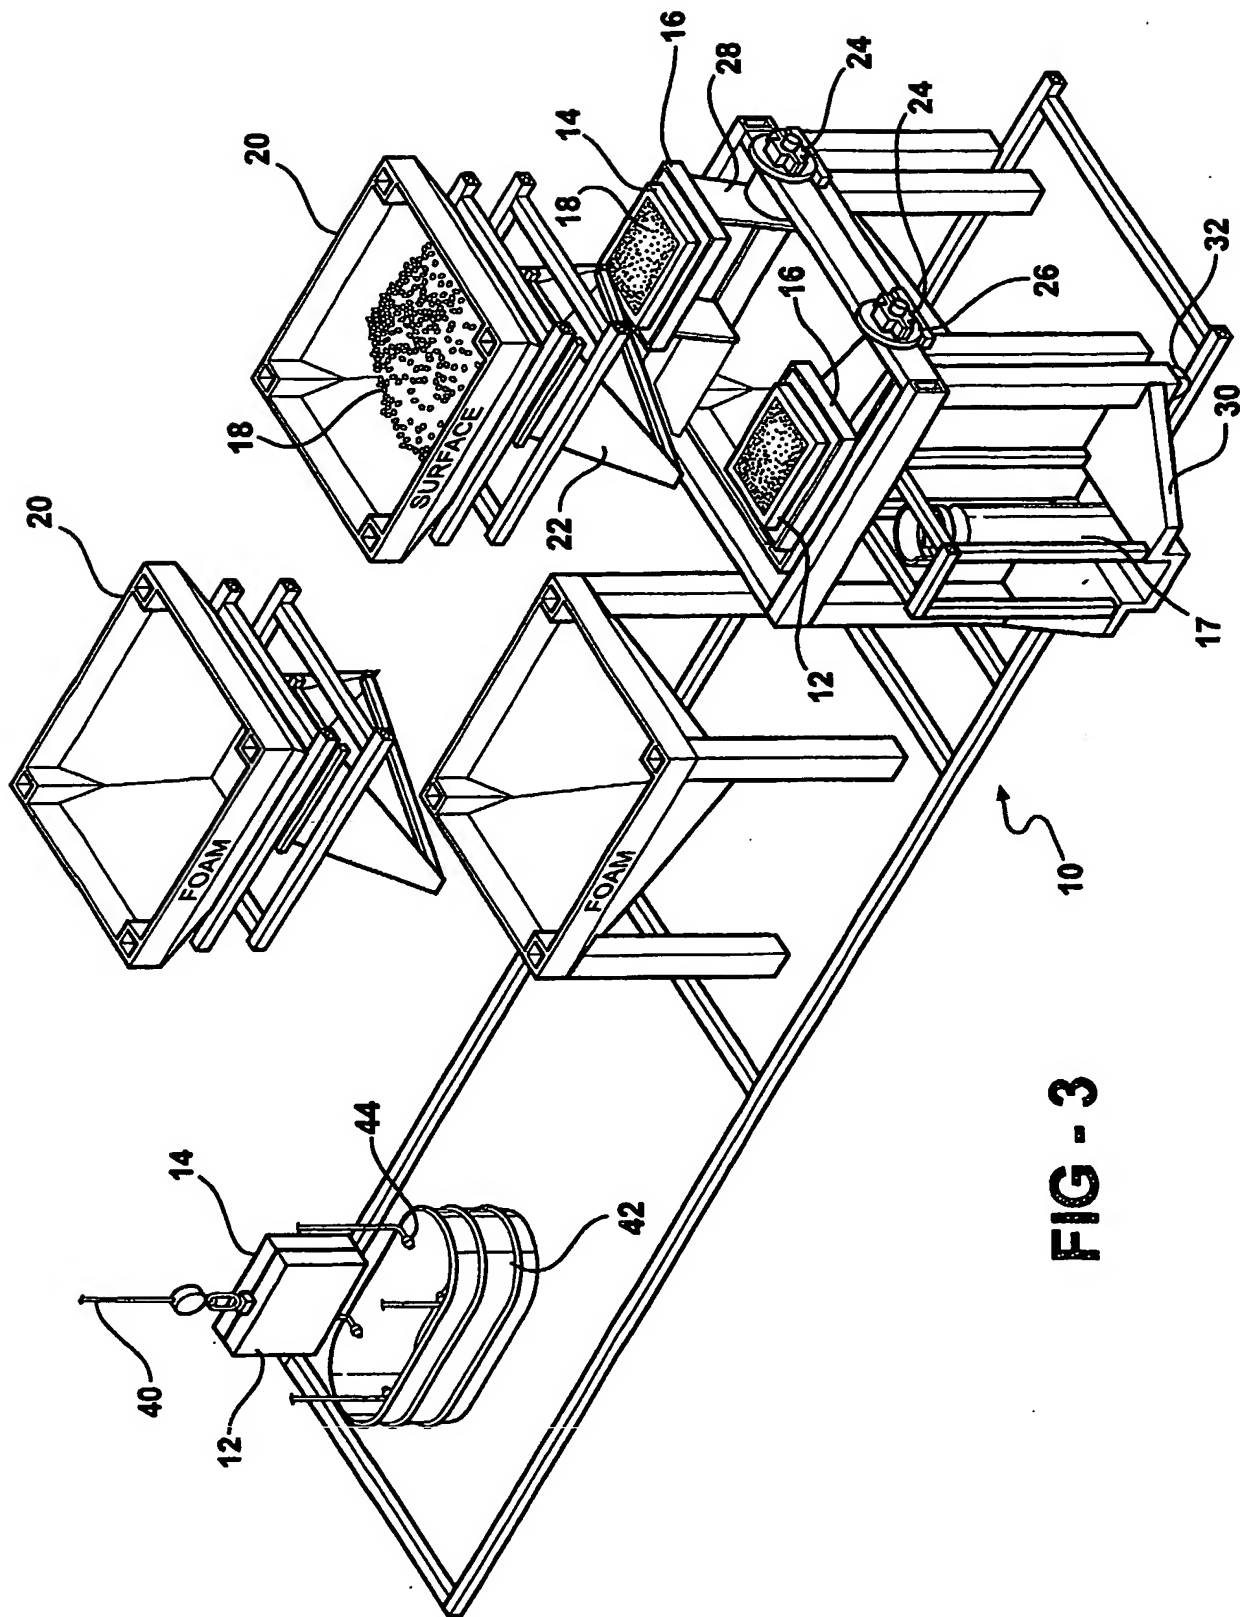
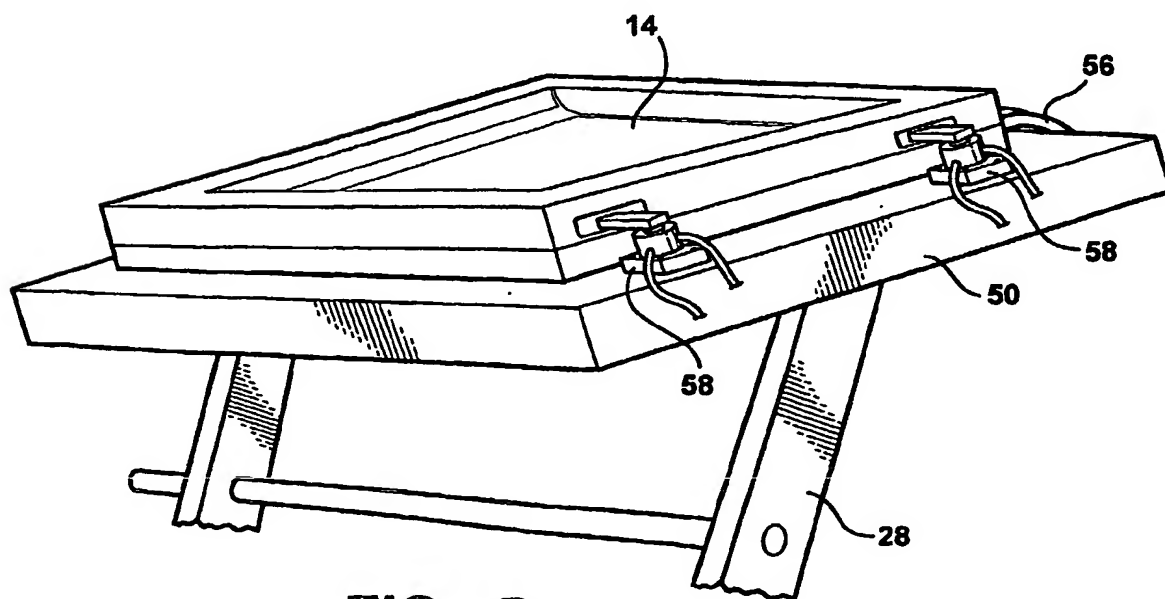
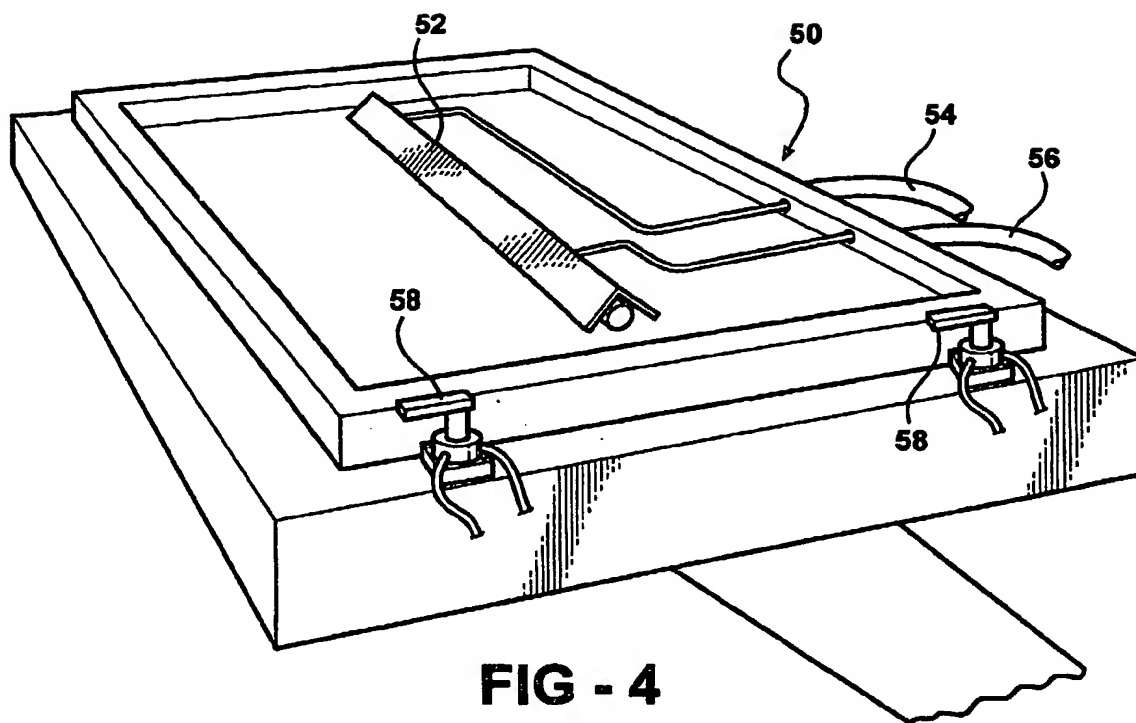


FIG - 3



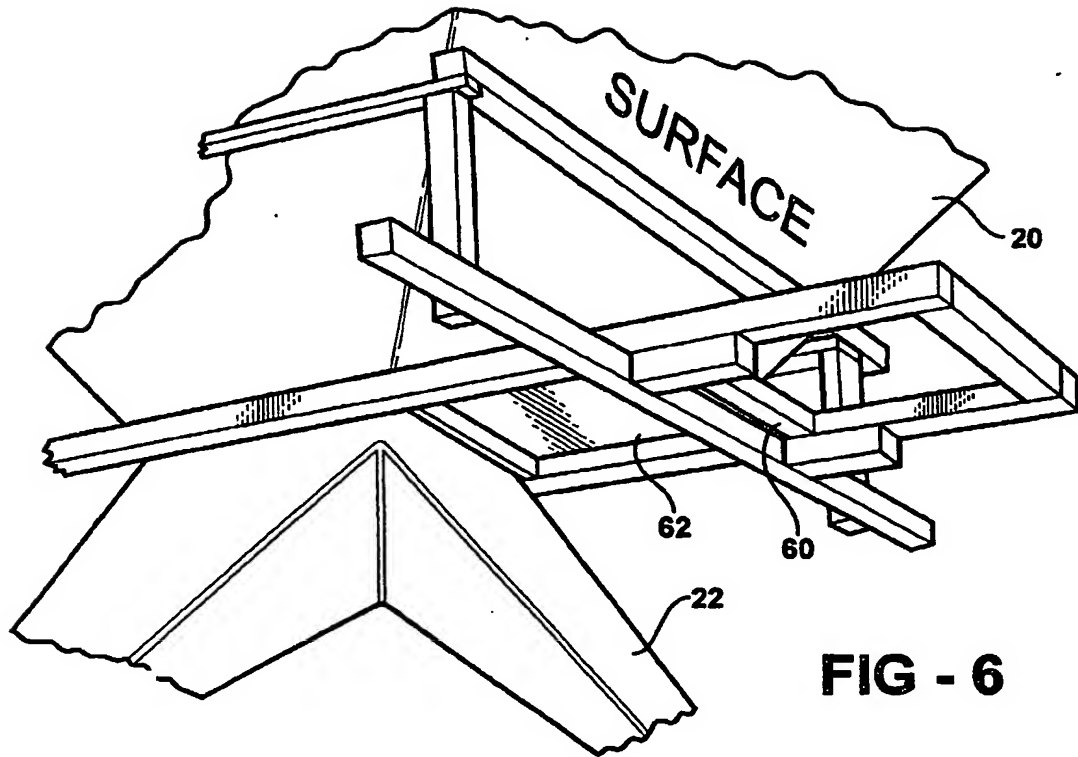


FIG - 6

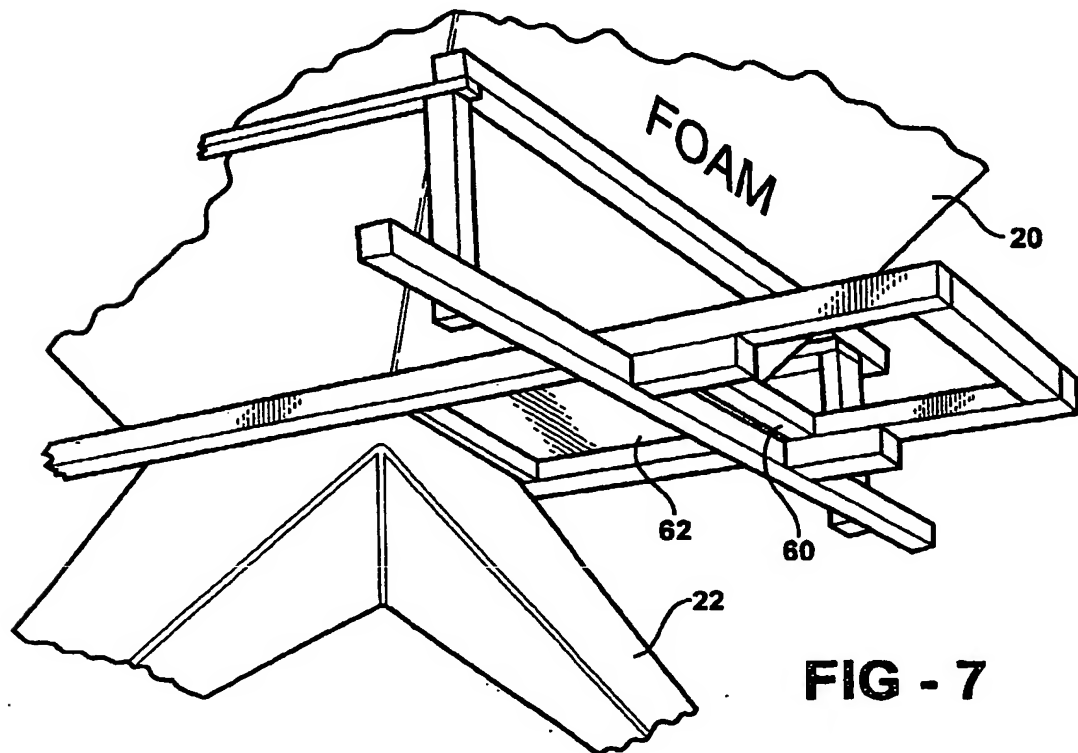
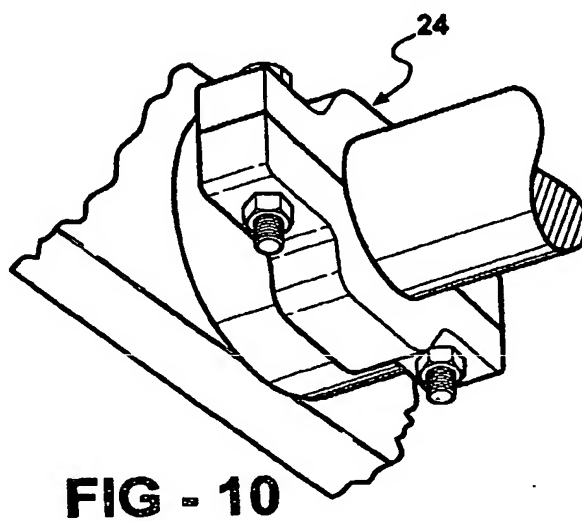
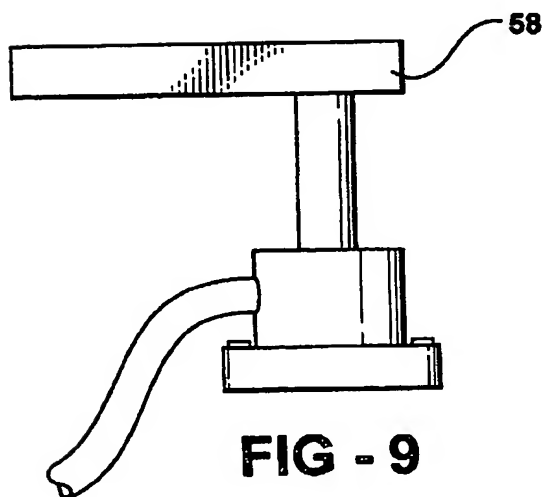
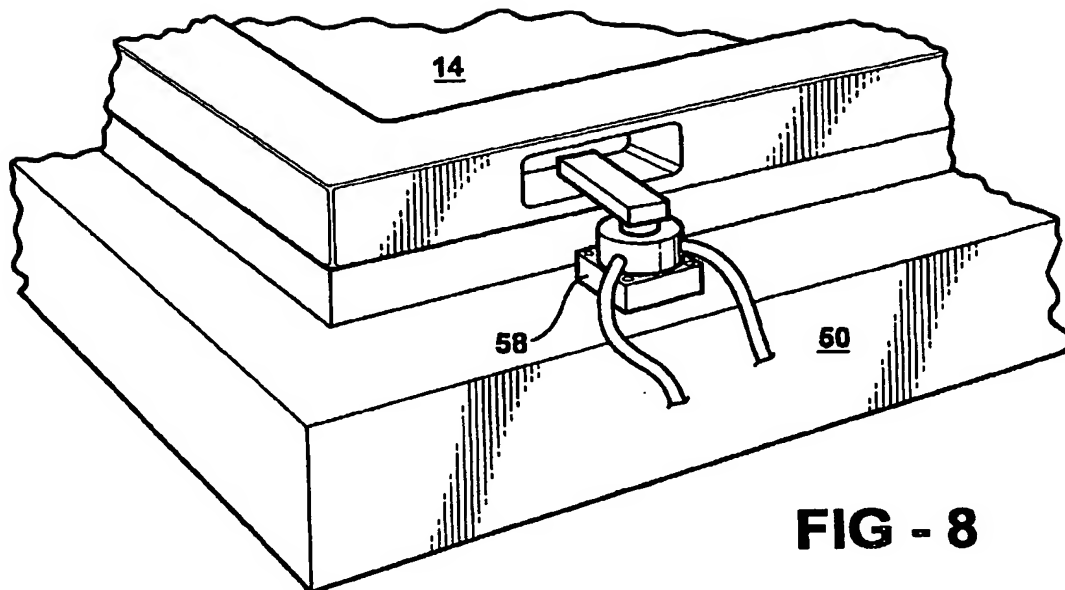


FIG - 7



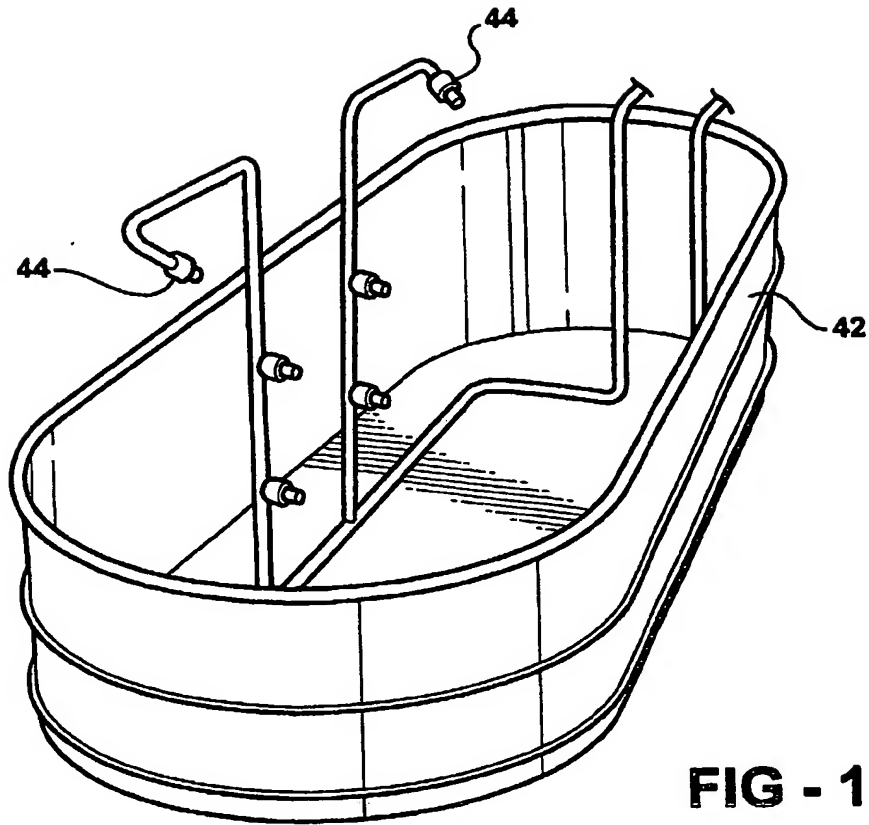


FIG - 11

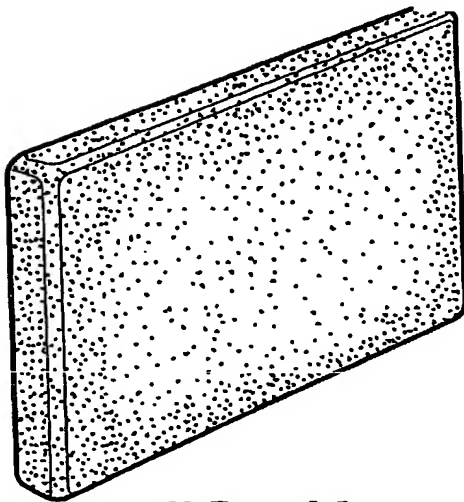


FIG - 12

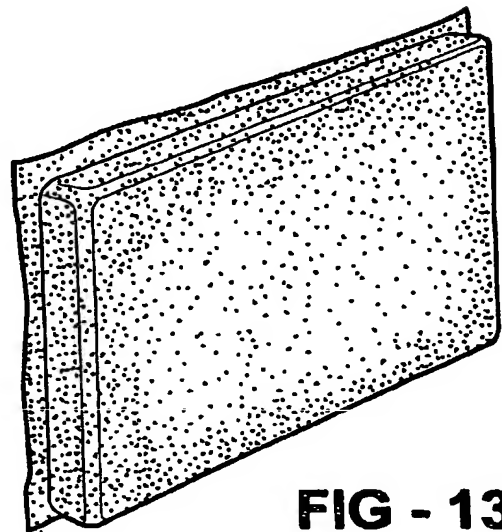


FIG - 13

**Box No. VIII (iii) DECLARATION: ENTITLEMENT TO CLAIM PRIORITY**

*The declaration must conform to the standardized wording provided for in Section 213; see Notes to Boxes Nos. VIII, VIII (i) to (v) (in general) and the specific Notes to Box No. VIII (iii). If this Box is not used, this sheet should not be included in the request.*

Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application specified below, where the applicant is not the applicant who filed the earlier application or where the applicant's name has changed since the filing of the earlier application (Rules 4.17(iii) and 51bis.1(a)(iii)):

in relation to this international application,

LINARES, Miguel A., and DINELLO, Panfilo M., are entitled to claim priority of earlier application No. 60/414,969

by virtue of the following:

the applicants are the inventors of the subject matter for which protection was sought by way of the earlier application.

This declaration is made for the purposes of the following designations for national and/or regional patents: US.

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (iii)".



**Box No. VIII (iv) DECLARATION: INVENTORSHIP** (only for the purposes of the designation of the United States of America)  
*The declaration must conform to the following standardized wording provided for in Section 214; see Notes to Boxes Nos. VIII, VIII (i) to (v) (in general) and the specific Notes to Box No. VIII (iv). If this Box is not used, this sheet should not be included in the request.*

**Declaration of inventorship (Rules 4.17(iv) and 51bis.1(a)(iv))  
for the purposes of the designation of the United States of America:**

I hereby declare that I believe I am the original, first and sole (if only one inventor is listed below) or joint (if more than one inventor is listed below) inventor of the subject matter which is claimed and for which a patent is sought.

This declaration is directed to the international application of which it forms a part (if filing declaration with application).

This declaration is directed to international application No. PCT/ Filed Herewith (if furnishing declaration pursuant to Rule 26ter).

I hereby declare that my residence, mailing address, and citizenship are as stated next to my name.

I hereby state that I have reviewed and understand the contents of the above-identified international application, including the claims of said application. I have identified in the request of said application, in compliance with PCT Rule 4.10, any claim to foreign priority, and I have identified below, under the heading "Prior Applications," by application number, country or Member of the World Trade Organization, day, month and year of filing, any application for a patent or inventor's certificate filed in a country other than the United States of America, including any PCT international application designating at least one country other than the United States of America, having a filing date before that of the application on which foreign priority is claimed.

Prior Applications: .....

I hereby acknowledge the duty to disclose information that is known by me to be material to patentability as defined by 37 C.F.R. § 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the PCT international filing date of the continuation-in-part application.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name: LINARES, Miguel A. ....

Residence: Bloomfield Hills, Michigan  
(city and either US state, if applicable, or country) .....

Mailing Address: 2769 Mackintosh Lane  
Bloomfield Hills, Michigan 48302 .....

Citizenship: United States of America .....

Inventor's Signature:   
(if not contained in the request, or if declaration is corrected or added under Rule 26ter after the filing of the international application. The signature must be that of the inventor, not that of the agent)


Date: September 30, 2003  
(of signature which is not contained in the request, or of the declaration that is corrected or added under Rule 26ter after the filing of the international application)

Name: DINELLO, Panfilo M. ....

Residence: Clinton Township, Michigan  
(city and either US state, if applicable, or country) .....

Mailing Address: 38623 Wingate  
Clinton Township, Michigan 48038 .....

Citizenship: United States of America .....

Inventor's Signature:   
(if not contained in the request, or if declaration is corrected or added under Rule 26ter after the filing of the international application. The signature must be that of the inventor, not that of the agent)

Date: September 30, 2003  
(of signature which is not contained in the request, or of the declaration that is corrected or added under Rule 26ter after the filing of the international application)

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (iv)".